




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04Q 7/34, 7/20		A2	(11) International Publication Number: WO 99/11081
			(43) International Publication Date: 4 March 1999 (04.03.99)
(21) International Application Number: PCT/IB98/01141		(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 27 July 1998 (27.07.98)			
(30) Priority Data: 08/919,052 27 August 1997 (27.08.97) US		Published <i>Without international search report and to be republished upon receipt of that report.</i>	
(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).			
(71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).			
(72) Inventors: HULYALKAR, Samir, N.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). NGO, Chiu; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). DU, Yonggang; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). MAY, Klaus, Peter; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). HERRMANN, Christoph; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			
(74) Agent: GROENENDAAL, Antonius, W., M.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).			

(54) Title: AN APPARATUS AND METHOD FOR PEER-TO-PEER LINK MONITORING OF A WIRELESS NETWORK WITH CENTRALIZED CONTROL

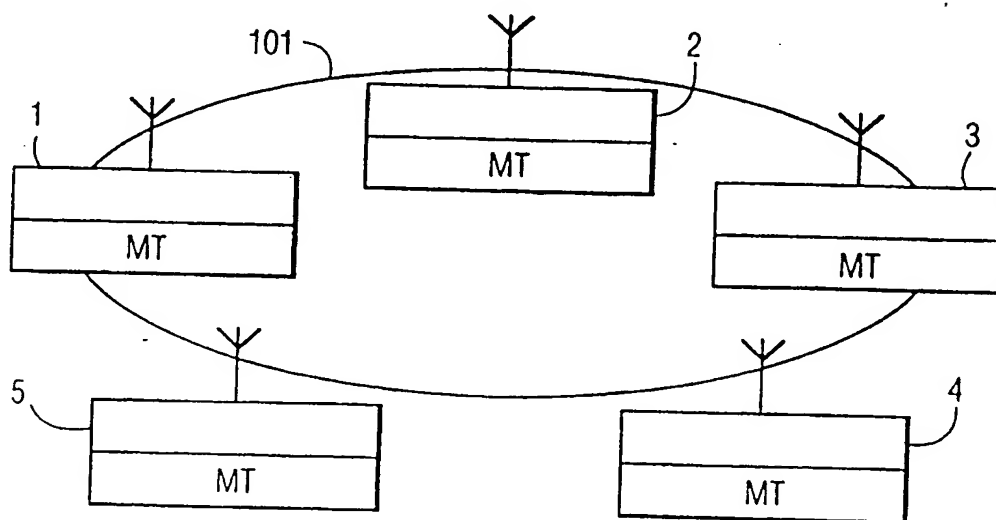

(57) Abstract

Centrally controlled wireless networks require reliable communications between the central controller and each of the stations within the wireless networks. The structure of a wireless network is often dynamic, or ad-hoc, as stations enter and exit the network, or are physically relocated. The selection of the central controller for the network may also be dynamic, either because the current central controller desires to exit the network, or because the communication between the current central controller and one or more of the stations is poor. This invention discloses a method and apparatus for assessing the quality of the communication paths among all stations in the network. This assessment is useful as a continual monitor of the quality of the network, and can be utilized to select an alternative central control station based upon the quality of communication paths to and from this station. Additionally, the quality assessment can be utilized to establish relay communication paths, as required.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

An apparatus and method for peer-to-peer link monitoring of a wireless network with centralized control

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to the monitoring of peer to peer links in a wireless network and in particular to the determination of an optimal network structure in dependence upon the monitored quality of these links. The invention is particularly well suited for wireless systems having a centralized control station, and is further well suited for wireless ATM (Asynchronous Transfer Mode) networks.

2. Discussion of the Related Art

A communications network requires a network protocol to operate effectively and efficiently. One such protocol for a wireless network is a contention-based protocol. In a contention based protocol network, any station is free to transmit whenever another station is not currently transmitting. Such a protocol, however, exhibits inefficiencies due to collisions, wherein two transmitters attempt to initiate transmission at the same time. The likelihood of collisions increase with an increase in network traffic, making contention based protocols inefficient for high traffic networks. Because collisions may occur, and will be undetectable by each of the transmitters, the contention-based protocol typically requires an acknowledgment from the intended receiver to the transmitter, further limiting the network's efficiency, and further increasing the likelihood of collisions.

An alternative to a contention-based protocol is a centralized control protocol, wherein one station in the network determines when each of the other stations may transmit. Each station transmits only during its allocated time, thereby eliminating the possibility of collisions, and thereby increasing the efficiency of the network. The communication of the information related to the control of the network incurs an overhead inefficiency, but this overhead is relatively independent of the quantity of communications on the network. Therefore, the centralized control protocol is particularly well suited for high traffic networks, or networks which require a deterministic quality of service (QoS), such as ATM.

An essential element to a centralized control protocol is that each station on the network must be able to communicate with the centralized controller. Wireless networks, however, often support mobile stations, and the ability to communicate between the controller and the mobile station must be assured regardless of the location of mobile station. One
5 architecture commonly utilized is a cellular network, wherein central controllers are placed throughout a region, each central controller having a local transmission area, or cell, within which communications with a station can be expected to be reliable. The central controllers are placed such that any point in the region lies within at least one cell. Such a cellular approach, however, requires that the central controllers be stationary, and does not readily
10 allow for a wireless communications network within which all stations may be mobile.

To support a wireless network having a centralized control structure, yet still allow for freedom of movement amongst all the stations on the network, the control structure should be reconfigurable, in dependence upon the changing environment. If communications within the current structure are poor, the structure should be changed to one, which provides
15 for a higher quality of communications. To effect such a reconfigurable network, a means must be provided to assess the quality of the existing network structure, and also to estimate the quality of an alternative network structure.

SUMMARY OF THE INVENTION

20

An object of this invention is to provide a method and apparatus for determining the quality of the communication paths within a network. It is a further object of this invention to utilize this quality determination to optimize the structure of the network. It is a further object of this invention to utilize this quality determination to establish optimized
25 paths for retransmission links within the network.

The quality of the communication paths within a network is determined by having each station within the network monitor and assess the quality of reception of transmissions from each of the other stations within the network. These individual quality assessments are forwarded, periodically or on demand, to a centralized controller. These
30 assessments then form a matrix of quality assessments, from which the structure of the network can be optimized, by selecting, for example, the station having the overall best quality measure relative to each of the others. The network is thereafter reconfigured to replace the current, sub-optimal, centralized control station with the selected station.

The matrix of quality assessments can also be utilized to identify problematic terminal-to-terminal links, and to institute retransmission relay paths to overcome the poor quality links.

5 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a wireless network, comprised of wireless terminals and a centralized controller.

10 Figure 2 shows the control and user plane link constellations of a wireless network.

Figure 3 shows a block diagram for a link monitor of a wireless terminal.

Figure 4 shows a block diagram for a link monitor of a centralized controller.

Figure 5 shows a link quality matrix for a wireless network.

15 DESCRIPTION OF THE PREFERRED EMBODIMENTS

For the purposes of this disclosure, the wireless networks described herein are presented in the context of wireless ATM (Asynchronous Transfer Mode) terminals, and protocols developed to efficiently manage the use of ATM for ad-hoc wireless
20 communications networks. It will be evident to one skilled in the art that the techniques and methods presented herein are applicable to other network architectures and protocols, and are well within the spirit and scope of this invention.

Figure 1 shows an ad hoc wireless ATM network 101. Such a network may be formed, for example, by people around a meeting table, with communicating devices (1-5) for exchanging
25 documents or notes. As each person enters the meeting, or as each person activates his or her communicating device, the network expands to include the new communications station; the network may also contract, as people leave the meeting or sign off the network. The network is termed ad hoc, because the formation and structure of the network is not fixed.

To initially form the network, one of the stations must perform the function of a
30 centralized controller. That is, for example, the first station to be turned on will act as a centralized controller, and will transmit a beaconing signal. This beaconing signal would be part of a network protocol wherein, in response to a beacon, stations wishing to enter the

network would respond in accordance with the aforementioned protocol. Conventionally, the portion of the protocol which addresses how the devices operate within the medium of the network is termed the Medium Access Control (MAC) level protocol. The ad hoc centralized controller, utilizing the network MAC protocol, would then manage any subsequent

5 transmission requests from each of the stations which it has admitted to the network. The management of transmission requests is accomplished by, for example, allocating specific time slots for each of the requesting transmitters. In accordance with ATM standards, a Quality of Service (QoS) parameter is associated with the admission of a station into the network. The centralized controller is responsible for determining the QoS level which can be
10 allocated to each station, and then allocating the time slots for transmission in accordance with this QoS. That is, for example, the centralized controller may grant a minimum bandwidth allocation QoS to a station; thereafter, on demand, the centralized controller must allocate a sufficient time slot to that station to satisfy the granted bandwidth allocation QoS.

Although the centralized controller manages all the traffic flow in the network,
15 it does not necessarily carry all the traffic flow. For efficiency, each station may transmit directly to any other station in the network. The MAC protocol will contain the necessary structure for effecting this station to station communication. For example, each message from each station may contain the address(es) of the intended recipient(s). Alternatively, the allocation messages from the centralized controller could also contain the intended recipients
20 for each of the allocated transmission slots, thereby allowing the wireless stations to enter a standby state between transmissions or receptions, thereby saving power.

Communications within the network thus comprise controller-to-station or control communications, and station-to-station, or user communications. Figure 2a shows the communications within the network on the control and user communications planes. As can be
25 seen, for effective control, the centralized controller 8 must be able to communicate with each of the wireless terminals 1, 2, 3, 4 and 5, along the control links 81, 82, 83, 84 and 85. Each of the wireless terminals 1, 2, 3, 4 and 5 must be able to communicate with each other terminal along user links 12, 13, 14, 15, 23, 24, 25, 34, 35 and 45 to transmit messages to each other. If a user link is inoperative, due to interference or the attenuation of the signal due to distance,
30 messages cannot be passed between the affected stations. If a control link is inoperative, however, the centralized controller will not be able to receive a request for transmission allocation from the affected station, or the affected station will not receive notification of the allocation. Thus, the communications links in the control plane must be reliable, because

without the control link, a station is, effectively, cut off from communication with every other station, even those with which a reliable user link exists.

In accordance with this invention, the quality of each communication link is continually assessed. In a wireless network, the transmissions are broadcast, and are receivable by any station within some viable range of the transmitter. Thus, whenever any station is transmitting, every other station on the network can assess the quality of reception of that transmission, even if the message is not intended to be received by each of these stations. If a receiving station knows, via the MAC protocol, which station is transmitting during each allocated time slot, the receiving station can monitor the network during each time slot, and associate a received signal quality to the transmitting station allocated to that slot. Thus, for example, station 1 of figure 2 can monitor the network during the time period allocated to station 2, and assess the quality of link 12. Similarly, station 2 can monitor the network during the time period allocated to station 1, and also assess the quality of link 12. Each link, being bi-directional, will have two quality factors associated with it; in each case the quality factor is the quality of the signal as received. Figure 2b shows each path of the link independently, wherein path 1-2 is the path from station 1 to station 2, and path 2-1 is the path from station 2 to station 1. The quality of path 1-2 is the quality of the signal transmitted by station 1, as received by station 2; and the quality of path 2-1 is the quality of the signal transmitted by station 2, as received by station 1.

Typically, the same means of communication are utilized in both the control and user planes of communication, and therefore the quality assessment can be made in either plane, and will be applicable in either plane. That is, station 2 can assess the quality of path 1-2 by monitoring the user, station-to-station, communications of station 1; or, it can assess the quality of path 1-2 by monitoring the control, station-to-controller communications of station 1. If alternative means are utilized for control and user communications, quality assessments for each of these types of communication can also be maintained.

The quality assessment by each station can be made by a number of techniques well known to those skilled in the art. As the signal is received, the SNR (Signal to Noise Ratio) can be measured and used as the quality assessment. Alternatively, the strength of each received signal can be measured in a relative manner, for example by the magnitude of the feedback signal in an AGC (Automatic Gain Control) circuit, and the quality assessment could be an ordering of each transmitting station by the magnitude of this signal.

In digital systems, other quality means are also available. A common quality measure for digital systems is an estimate of the likelihood of an erroneous bit value being

received, a bit error. Most communications protocols include an error detection means, and, the detection of an error can be used for an assessment of a bit error rate associated with the path. In the simplest protocols, parity bits are employed to verify the integrity of each data byte. A receiver can perform a bit error quality assessment by counting the number of bytes
5 with improper parity. A weak path would have a high proportion of improper parity bytes, whereas a strong path would exhibit a low proportion of improper parity bytes. In other protocols, error correction bytes are appended to the data messages. A count of the number of times the correction bytes are employed to self-correct the data message may also be utilized as a quality assessment measure.

10 Note that the aforementioned quality assessments are independent of the data content of the signals being transmitted by the transmitting station, and therefore each station can monitor the quality without the need to decode, per se, each of the transmissions. This allows for a quality assessment with minimal overhead, and also allows for security means, such as the encryption of the data contents, to be employed without impacting the feasibility of
15 this quality assessment. Note also that monitoring the routine transmissions of the stations performs the quality assessment; that is, a separate test messaging procedure is not required. This requires, however, that the station routinely transmit, for the quality assessment to occur. If a station has no traffic to send for an extended period, the protocol can be enhanced to include a prompt by the central controller for the station to transmit a dummy, or test,
20 message.

Depending on the network environment, the quality assessment can occur regularly, or on demand. If it is known that the network is relatively stable, the quality assessment may be made only upon the entry or removal of a station from the network. If the network is dynamic, for example, comprising mobile wireless terminal, such that the
25 characteristics of each path may change often, quality assessments may be made continuously, with each transmission. Also dependent upon the dynamic nature of the network, alternative means can be employed to process a number of quality assessments for each path. For example, a running average may be maintained and updated with each transmission assessment, or, the latest assessment may replace any prior assessment. In a very low error rate
30 and stable environment, a cumulative measure may be utilized, such as the sum of parity errors received over the previous N transmissions.

The quality assessment process is shown in figure 3 as a partial block diagram of a receiving station. As shown, the receiving station receives an RF signal 310 into an RF subsystem 320. A Medium Access Control (MAC) subsystem 330 operates in conjunction

with a wireless control block 340 to direct selected portions of the received signal to the link monitor 350. The MAC subsystem 330 and wireless control block 340 determine which transmitter is transmitting the signal being received, as discussed above, and the link monitor 350 performs the SNR measurements or bit error measurements discussed above. The results of the assessment, and the corresponding transmitting station identifier, are stored in a local database 360 within each receiving station.

Each station will maintain, in its local database 360, a quality assessment for each path to each other station. For example, station 1 will maintain the quality assessments for paths 2-1, 3-1, 4-1, etc. Station 3 will maintain the quality assessments for paths 1-3, 2-3, 4-3, etc.

The block diagram of a central controller is shown in figure 4. The centralized controller will periodically poll the stations within the network for the quality assessments. As shown in figure 4, because the centralized controller is typically also an operational wireless terminal, the centralized controller contains elements similar to those of figure 3. The centralized controller, as a wireless station, maintains a local database 360, as discussed above. The centralized controller also contains a QoS manager 470, which performs the time allocation process for controlling the MAC subsystem 330. The QoS manager, via the MAC protocol, polls the stations for their quality assessments. Upon receipt of these assessments, via the RF subsystem 320, the wireless control block 340, and the MAC subsystem 330, the QoS manager 470 stores the quality factors from each station, and from its own local database 360, into a Global Database 480. Thus, the global database will contain a quality assessment for each path within the network. From this assessment, the centralized controller can assess how well its transmissions are being received by each of the other stations. More significantly, it can assess whether any station is being received by each of the other stations with a higher quality measure.

Commensurate with this invention, any number of techniques may be employed to evaluate the network quality assessment measurements to select a preferred station to be utilized as centralized controller. Figure 5 shows the organization of the quality measurements as a matrix. The rows of the matrix are the transmitting station identifiers, and the columns of the matrix are the receiving station identifiers. The entry at each cell of the matrix is the reported quality assessment, ranging from 0 for low quality, to 100 for high quality. To demonstrate the dynamic nature of the network, transmitters 4 and 7 are shown having a quality of 0 for each receiver, indicating that transmitters 4 and 7 are no longer actively

transmitting in the network. Alternatively, the entries for these stations could contain the last reported values concerning these stations.

Assuming that, consistent with figure 2, station 8 is the centralized controller, it can be determined that station 2 would be a preferable station to perform the functions of a centralized controller. In all instances, transmissions from station 2 are received at each other station with a higher quality measure than transmissions from station 8. That is, the entry at row 2, column 1, hereinafter referred to as cell 2-1, representing the quality of transmission from station 2 to station 1, is 82. The entry at cell 8-1 (row 8, column 1), representing the quality of transmission from station 8 to station 1, is 78. Therefore transmission from station 2 are received at station 1 with higher quality than transmissions from station 8. From the perspective of station 1, station 2 is preferred to station 8. Similarly, the entries at cells 2-3, 2-5, and 2-6 are higher, respectively, than those at 8-3, 8-5, and 8-6. Thus, stations 3, 5, and 6 would each prefer station 2 to station 8.

In conventional optimization terminology, station 2 is said to dominate station 8, with respect to receptions at each of the other stations. If station 2 has the capability of providing central controller services, the network can be reconfigured to replace station 8 with station 2 as the central controller. This reconfiguration can be accomplished by having station 8 send a message to station 2, instructing it to assume the role of central controller. Accompanying this message would be any information required by station 2 to perform the tasks of the central controller for the existing network, including such items as the current network configuration, the assigned QoS to each station, etc. Thereafter station 2 would respond to requests for services from the other stations and respond accordingly.

Other techniques or algorithms can be used to select a preferable central controller. For example, the station having the highest minimum value may be selected as the preferred centralized controller. Although station 2 dominates station 8, station 5 may be selected as the preferred centralized controller because its minimum received quality is 67, at cell 5-3. That is, even though its signal is not received as strongly at station 1 than that of either stations 2 or 8, having a quality of 71 at 5-1, compared to qualities of 82 and 78 at 2-1 and 8-1 respectively, the reception of signals from station 5 is at least 67 for all stations, whereas station 2 has a quality measure of 48 at receive station 6 (cell 2-6), and station 8 has a quality measure of 42 at station 3 (cell 8-3).

An alternative selection technique can be to choose the station having the greatest average received quality, or the greatest mean squared received value, or other characteristic statistic value. Additionally, a combination of these techniques can be employed.

For example, a specified minimum value can be required, and from among those stations having each of their quality measures greater than the specified minimum, the station having the highest average quality measure can be selected. In addition to considering the quality of a station's transmissions to each of the other stations, the station's reception quality from each of the other stations can be considered. For example, the station having the highest minimum entries in its corresponding rows and column in the matrix may be selected as the preferred station. Or, the station which has at least a specified minimum quality of reception from other stations and has the highest average quality of reception of its transmissions to the other stations may be the preferred centralized controller. These and other selection and optimization techniques are well known to one skilled in the art, and are within the scope and spirit of this invention.

Additionally, the selection of a new centralized controller can be made to be dependent upon the quality assessment of the existing centralized controller. That is, for example, a new centralized controller may not be selected unless and until the existing centralized controller falls below some specified quality criteria. In this way, the overhead required to transfer control to another station can be avoided until it becomes important for the integrity of the network.

A further use of the quality assessment in accordance with this invention is to select alternative relay retransmission paths. If a path has a poor quality, efficiency will be lost as transmissions across this path may often require repetition until they are received accurately. Most protocols include some form of ACK/NAK (Acknowledged/Not-Acknowledged) signaling. When an intended receiver does not respond with an acknowledge signal, directly or via the centralized controller, the transmitter must resent the transmitted message. Efficiency may be improved by noting which paths require repeated transmissions, and replace the affected paths with alternative, relay paths, wherein messages are transmitted to one station, for relay to another station. Such a relay will require two transmissions per message; the message is transmitted from the original transmitter to the relay station, and then from the relay station to the original intended receiver. If the paths to and from the relay station are reliable, a gain in efficiency can be achieved by instituting such a relay path if the original (direct) path averaged more than one repetition per message. Consider, for example, transmission path 1-3, with a quality measure of 21 shown in figure 5. If this path exhibits frequent repetitions of transmissions, due to the poor quality, a more reliable and efficient alternative path can be created by considering the quality measures of other paths. Transmission path 1-6 shows a high quality measure (88), as does path 6-3 (91). Based on

these measured quality levels, the problematic path 1-3 can be replaced by a relay path of 1-6-3; that is, transmissions from station 1 intended for station 3 will be received by station 6 and retransmitted by station 6 to station 3.

Relay paths may also be instituted based solely on the measured quality levels.

5 That is, for example, quality levels below a specified value may be considered a priori unreliable. If a path is deemed unreliable, an alternative relay path is established. That is, for example, if a quality level of 25 is selected as a threshold value, below which a path is deemed unreliable, then path 1-3 in figure 5, having a quality level of 21, would be deemed unreliable, regardless of the number of retransmission experienced between paths 1 and 3. Based on this
10 determination, alternative relay path 1-6-3 would be instituted as discussed above. Optionally, both techniques may be employed to initiate the institution of a relay path: a relay path is established if either the retransmission rate of the path is above a specified level or if the quality measure is below a specified level. Or, a set of combinations of retransmission rates and quality levels could be used to institute a relay path. For example, path 3-1 has a mediocre
15 quality level (35) shown in figure 5. A rule may be established such that any path having a quality level below 40 will be replaced by a relay path upon the occurrence of the first request for retransmission. Thereby, if no retransmissions are required on path 3-1, despite its somewhat low quality level, it would not be replaced by an alternative relay path. Conversely a rule may be established whereby any path having a quality level above 60 will not have an
20 alternative relay path established until five retransmission requests are experienced on that path within a given time period; in this way, intermittent interferences will not necessarily trigger the establishment of a relay path to replace a path with a somewhat good quality measure. These and other techniques for determining when to initiate a relay path based upon quality measures will be evident to one skilled in the art and are within the object and scope of
25 this invention.

The foregoing merely illustrates the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements which, although not explicitly described or shown herein, embody the principles of the invention and are thus within its spirit and scope.

CLAIMS:

1. A communications system comprising a plurality of communication stations associated with a network,
 - one of said stations being designated as a central station,
 - each of said stations comprising a transmitter and a receiver,
 - 5 said network comprising a transmit-receive path between each transmitter of each of said stations and each receiver of each of said other stations,
 - each of said transmitters comprising a means for transmitting a message for reception by one or more of the receivers of the other stations,
 - each of said receivers comprising:
 - 10 a means for receiving a received message, said received message being a transmitted message from one of said transmitters,
 - a means for identifying the transmitter of the received message,
 - a means for measuring the quality of the received message, and
 - a means for determining a quality factor associated with the transmitter
 - 15 in dependence upon the measured quality of the received message; and,
 - said central station comprising:
 - a means for obtaining the quality factor associated with one or more transmitters from each station, and
 - a means for determining a quality measure associated with the
 - 20 transmit-receive paths in dependence upon said obtained quality factors.
2. A communications system as claimed in claim 1, wherein
 - said means for measuring the quality of the received message comprises means
 - for measuring a Signal-to-Noise Ratio (SNR) of a signal associated with said received
 - 25 message.
3. A communications system as claimed in claim 1, wherein

said means for measuring the quality of the received message comprises means for measuring a bit error rate associated with said received message.

4. A communications system as claimed in claim 1, wherein the central station

5 further comprises:

a means for assessing said quality measures, and

a means for determining one of said stations for designation as an alternative central station in dependence upon said assessment of the quality measures.

10 5. A communications system as claimed in claim 1, wherein the central station further comprises:

a means for assessing said quality measures, and

a means for determining an alternative relay transmission path for one or more of said transmit-receive paths in dependence upon said assessment of the quality

15 measures.

6. A communication device for communicating in a network comprising a plurality of communication stations, wherein each of said communication stations comprise a means for transmitting messages intended to be received at one or more of the other

20 communication stations,

said communication device comprising:

a means for receiving a message transmitted from the communication stations,

a means for identifying the communication stations which transmitted

25 the message,

a means for measuring the quality of the message, and

a means for determining a quality factor associated with each communication station in dependence upon the measured quality of one or more of said received messages; and

30 a means for communicating said quality factors to a central station.

7. A communication device as claimed in claim 6, wherein

said means for measuring the quality of the message comprises means for

measuring a Signal-to-Noise Ratio (SNR) of a signal associated with said message.

8. A communication device as claimed in claim 6, wherein
said means for measuring the quality of the message comprises means for
5 measuring a bit error rate associated with said message.

9. A communications device as claimed in claim 6, wherein the communications
device also comprises:

10 a means for obtaining the quality factor associated with one or more
communication stations from each of the other communications stations, and

a means for determining a quality measure associated with the network
in dependence upon said obtained quality factors.

10. A communications device as claimed in claim 9, wherein the communications
15 device also comprises:

a means for determining one of said stations for designation as an
alternative central station in dependence upon said quality measure.

11. A communications system as claimed in claim 9, wherein the communications
20 device also comprises:

a means for determining an alternative relay transmission path for one
or more of said transmit-receive paths in dependence upon said quality measure.

12. A method for assessing the quality of a communications network, said network
25 comprising communication stations comprising means of transmitting and receiving messages,
wherein said method comprises the steps of:

transmitting a message from a transmitting communication station,
receiving the message at a plurality of receiving communication stations, and,
at each receiving communication station,

30 identifying the transmitting communication station,
measuring the quality of the received message, and
determining a quality factor associated with the transmitting
communication station in dependence upon the measured quality of the received message; and,

after repeating the above steps for other transmitting communication stations,
having each communication station communicate the quality factors associated
with each of said transmitting communication stations to a central station,

5 said central station thereby assessing the quality of the communication network
in dependence upon said quality factors.

13. A method as claimed in claim 12, wherein
said step of measuring the quality of the received message comprises a step of
measuring a Signal-to-Noise Ratio (SNR) of a signal associated with said received message.

10

14. A method as claimed in claim 12, wherein
said step of measuring the quality of the received message comprises a step of
measuring a bit error rate associated with said received message.

15 15. A method for determining a preferred central controller for a communications
network, said communications network comprising communication stations and
communication paths between each of said communication stations, one of said
communication stations being a current central controller, wherein said method comprises the
steps of:

20 transmitting a message from a transmitting communication station,
receiving the message at a plurality of receiving communication stations, and,
at each receiving communication station,

identifying the transmitting communication station,
measuring the quality of the received message, and

25 determining a quality factor associated with the transmitting
communication station in dependence upon the measured quality of the received message; and,
after repeating the above steps for other transmitting communication stations,
having each communication station communicate the quality factors associated
with each of said transmitting communication stations to the current central controller,
30 said current central controller thereafter:

assessing the quality of the communication paths in dependence upon
said quality factors, and,

determining the preferred central controller in dependence upon the
assessed quality of the communication paths.

16. A method as claimed in claim 15, wherein
said step of measuring the quality of the received message comprises a step of
measuring a Signal-to-Noise Ratio (SNR) of a signal associated with said received message.

5

17. A method as claimed in claim 15, wherein
said step of measuring the quality of the received message comprises a step of
measuring a bit error rate associated with said received message.

10 18. A method for determining a relay path for a communication path within a
communications network, said communications network comprising communication stations
and communication paths between each of said communication stations, one of said
communication stations being a current central controller, wherein said method comprises the
steps of:

15 transmitting a message from a transmitting communication station,
receiving the message at a plurality of receiving communication stations, and,
at each receiving communication station,
identifying the transmitting communication station,
measuring the quality of the received message, and
20 determining a quality factor associated with the transmitting
communication station in dependence upon the measured quality of the received message; and,
after repeating the above steps for other transmitting communication stations,
having each communication station communicate the quality factors associated
with each of said transmitting communication stations to the current central controller,
25 said current central controller thereafter:
assessing the quality of the communication paths in dependence upon
said quality factors, and,
determining the relay path in dependence upon the assessed quality of
the communication paths.

30

19. A method as claimed in claim 18, wherein
said step of measuring the quality of the received message comprises a step of
measuring a Signal-to-Noise Ratio (SNR) of a signal associated with said received message.

20. A method as claimed in claim 18, wherein
said step of measuring the quality of the received message comprises a step of
measuring a bit error rate associated with said received message.

1/4

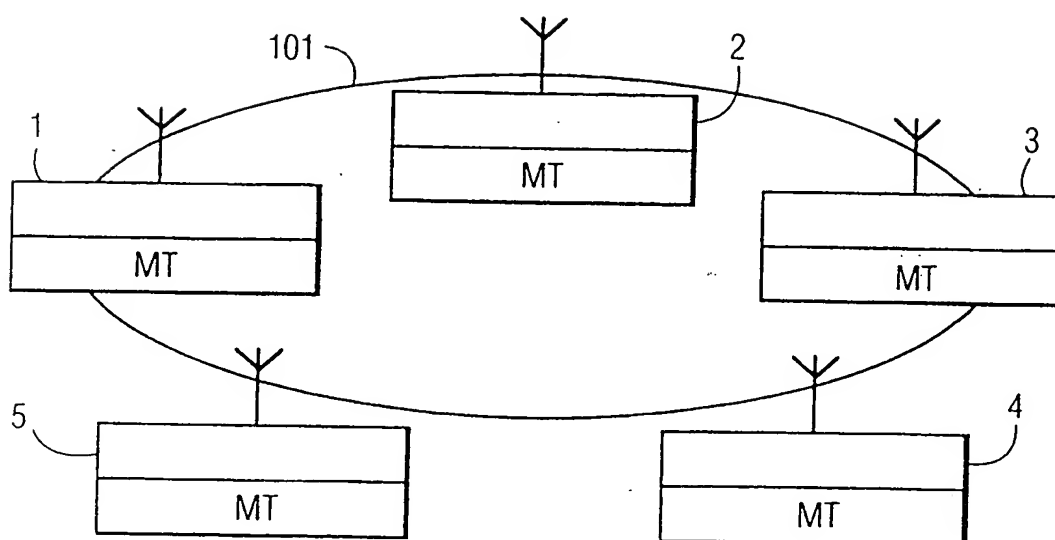


FIG. 1

2/4

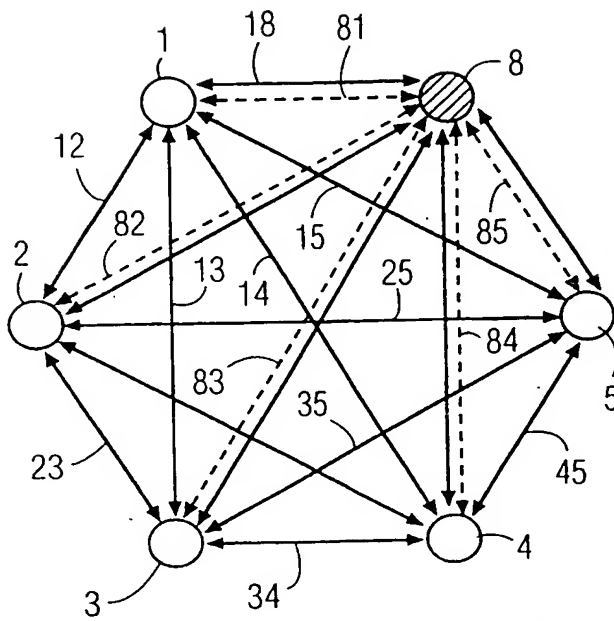


FIG. 2A

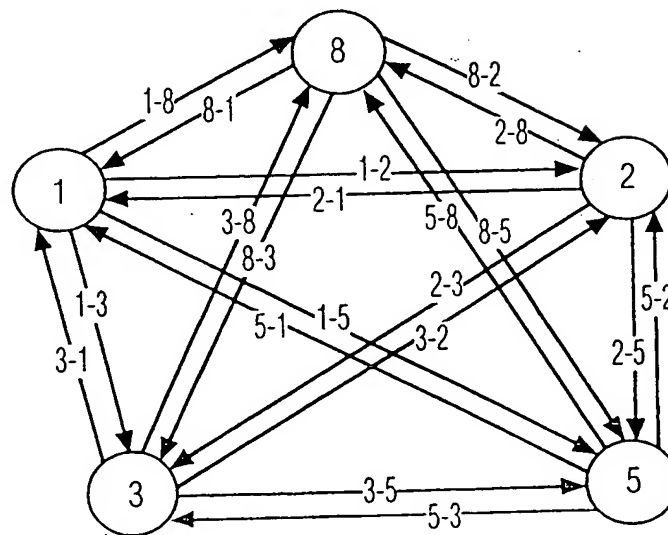


FIG. 2B

3/4

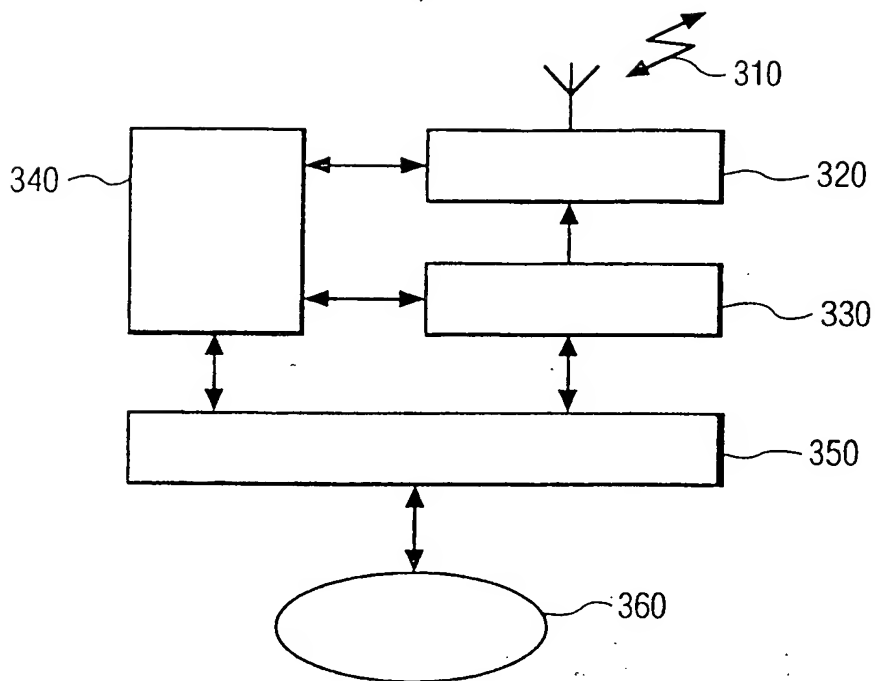


FIG. 3

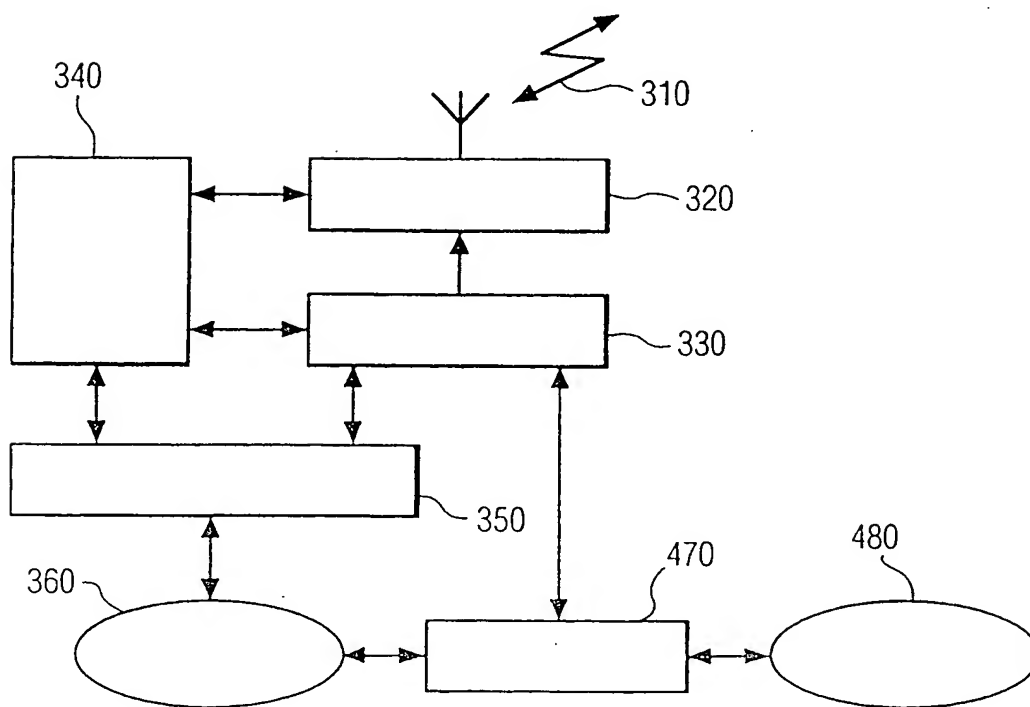


FIG. 4

4/4

	1	2	3	4	5	6	7	8
1	-	84	21	-	73	88	-	72
2	82	-	63	-	70	48	-	83
3	35	61	-	-	64	89	-	46
4	0	0	0	-	0	0	-	0
5	71	74	67	-	-	81	-	69
6	80	53	91	-	83	-	-	51
7	0	0	0	-	0	0	-	0
8	78	82	42	-	66	45	-	-

FIG. 5



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

H04Q 7/34, 7/20, H04L 29/08

A3

(11) International Publication Number:

WO 99/11081

(43) International Publication Date:

4 March 1999 (04.03.99)

(21) International Application Number: PCT/IB98/01141

(22) International Filing Date: 27 July 1998 (27.07.98)

(30) Priority Data:

08/919,052

27 August 1997 (27.08.97)

US


(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V.
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven
(NL).(71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7,
Kista, S-164 85 Stockholm (SE).(72) Inventors: HULYALKAR, Samir, N.; Prof. Holstlaan 6,
NL-5656 AA Eindhoven (NL). NGO, Chiu; Prof. Holstlaan
6, NL-5656 AA Eindhoven (NL). DU, Yonggang; Prof.
Holstlaan 6, NL-5656 AA Eindhoven (NL). MAY, Klaus,
Peter; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
HERRMANN, Christoph; Prof. Holstlaan 6, NL-5656 AA
Eindhoven (NL).(74) Agent: GROENENDAAL, Antonius, W., M.; Internationaal
Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven
(NL).(81) Designated States: JP, European patent (AT, BE, CH, CY, DE,
DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(88) Date of publication of the international search report:

20 May 1999 (20.05.99)

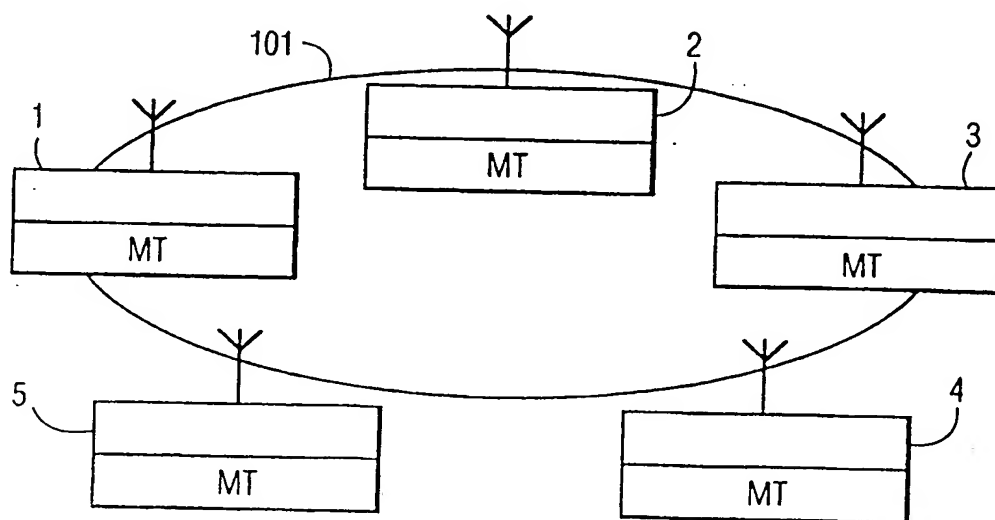(54) Title: AN APPARATUS AND METHOD FOR PEER-TO-PEER LINK MONITORING OF A WIRELESS NETWORK WITH
CENTRALIZED CONTROL

(57) Abstract

Centrally controlled wireless networks require reliable communications between the central controller and each of the stations within the wireless networks. The structure of a wireless network is often dynamic, or ad-hoc, as stations enter and exit the network, or are physically relocated. The selection of the central controller for the network may also be dynamic, either because the current central controller desires to exit the network, or because the communication between the current central controller and one or more of the stations is poor. This invention discloses a method and apparatus for assessing the quality of the communication paths among all stations in the network. This assessment is useful as a continual monitor of the quality of the network, and can be utilized to select an alternative central control station based upon the quality of communication paths to and from this station. Additionally, the quality assessment can be utilized to establish relay communication paths, as required.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/01141

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/34, H04Q 7/20, H04L 29/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9634501 A1 (AMERICAN PERSONAL COMMUNICATIONS), 31 October 1996 (31.10.96), page 4, line 25 - page 8, line 22 --	1,2,6,8,9, 12,13
X	EP 0777395 A1 (NOKIA MOBILE PHONES LTD.), 4 June 1997 (04.06.97), column 5, line 57 - column 6, line 9; column 7, line 46 - column 8, line 43, abstract -- -----	1,3,5,6,8,9, 11,12,14,18, 20

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 March 1999

Date of mailing of the international search report

15-03-1999

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Peter Hedman

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/02/99

International application No.
PCT/IB 98/01141

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9634501	A1	31/10/96	CA	2193741 A	31/10/96
				US	5752164 A	12/05/98
EP	0777395	A1	04/06/97	FI	102132 B	00/00/00
				FI	955813 A	02/06/97
				JP	9186703 A	15/07/97